


GTVE–Drosselklappe (elektrisch)

zum Verschließen von offenen Rohrleitungen
inkl. Dichtung - Ausführung verzinkt - beidseitig mit Bord

The throttle valves are stitch-welded and spot-welded construction, turned by an electric motor. Blade rotation time to open or close - 30s. Made from 0.9mm galvanized sheet, rolled, stitch welded with 6mm edges for lock rings. Relative tightness between 90 and 95% in closed position. Flanges for connection can be used as an option on request. Electrical connection: 230 V AC - 50 Hz or 24 V DC.

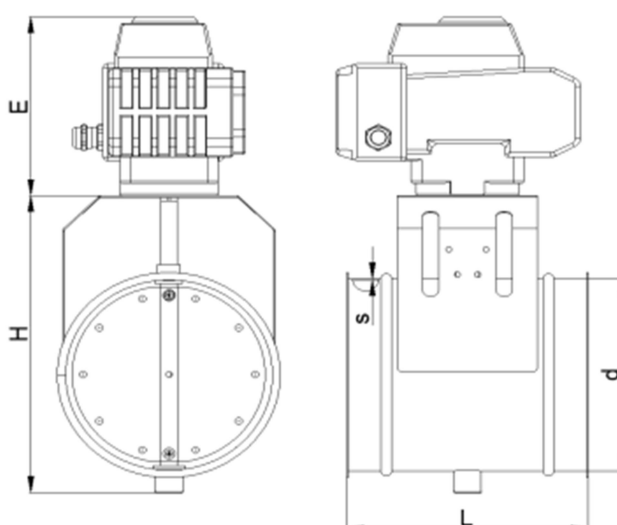

Diameter	Thickness	Height	Height	Length	Weight
Ød, mm	s, mm	H, mm	E, mm	L, mm	kg
080	0,9	200	138	125	3,4
100	0.9	200	138	125	3,5
120	0.9	200	138	135	3,6
125	0.9	200	138	135	3,7
140	0.9	245	138	170	4,1
150	0.9	245	138	170	4,1
160	0.9	245	138	170	4,1
180	0.9	300	138	210	4,6
200	0.9	300	138	210	4,9
225	0.9	340	138	240	5,3
250	0.9	340	138	265	5,6
300	0.9	400	138	315	6,9
315	0.9	400	138	330	7,2
350	0.9	490	138	365	8,1
400	0.9	490	138	415	9,4

- Dichtheitsgrad Klappenblatt liegt zwischen 90-95% im geschlossenen Zustand