

Available configurations - parameters

Index	Power [kW]	No. of phases	Voltage [V]	Frequency [Hz]	Rotation speed [rpm]	D* [mm]	Rated current [A]	Maximal airflow [m ³ /h]	Maximal pressure [Pa]	Noise level [dB(A)]	Maximal operation temperature [°C]
105202-000	0,75	3	400	50	2800	160	1,7	1550	1280	77	40
105202-100	0,75	1	230	50	2800	160	5,0	1550	1280	77	40
105202-401	0,75	3	460	60	3360	150	1,6	1920	1990	79	40
105202-701	0,75	1	110/220	60	3360	150	10,6/5,3	1920	1990	79	40

105202 ZWR-03 fan

Construction:


- Radial fan
- Dynamically balanced aluminum impeller
- Impeller mounted directly on motor shaft
- Steel, welded and powder coated construction
- Inlet and outlet safety grates

Notes:

- * Nominal diameter
- ** Overall height can differ depending on configuration and motor supplier

Document changes:

The method of packing and carton sizes:




A = 605
B = 505
H = 550
Weight = 30 kg

All dimensions are in mm

Fan performance curve

ZWR-03

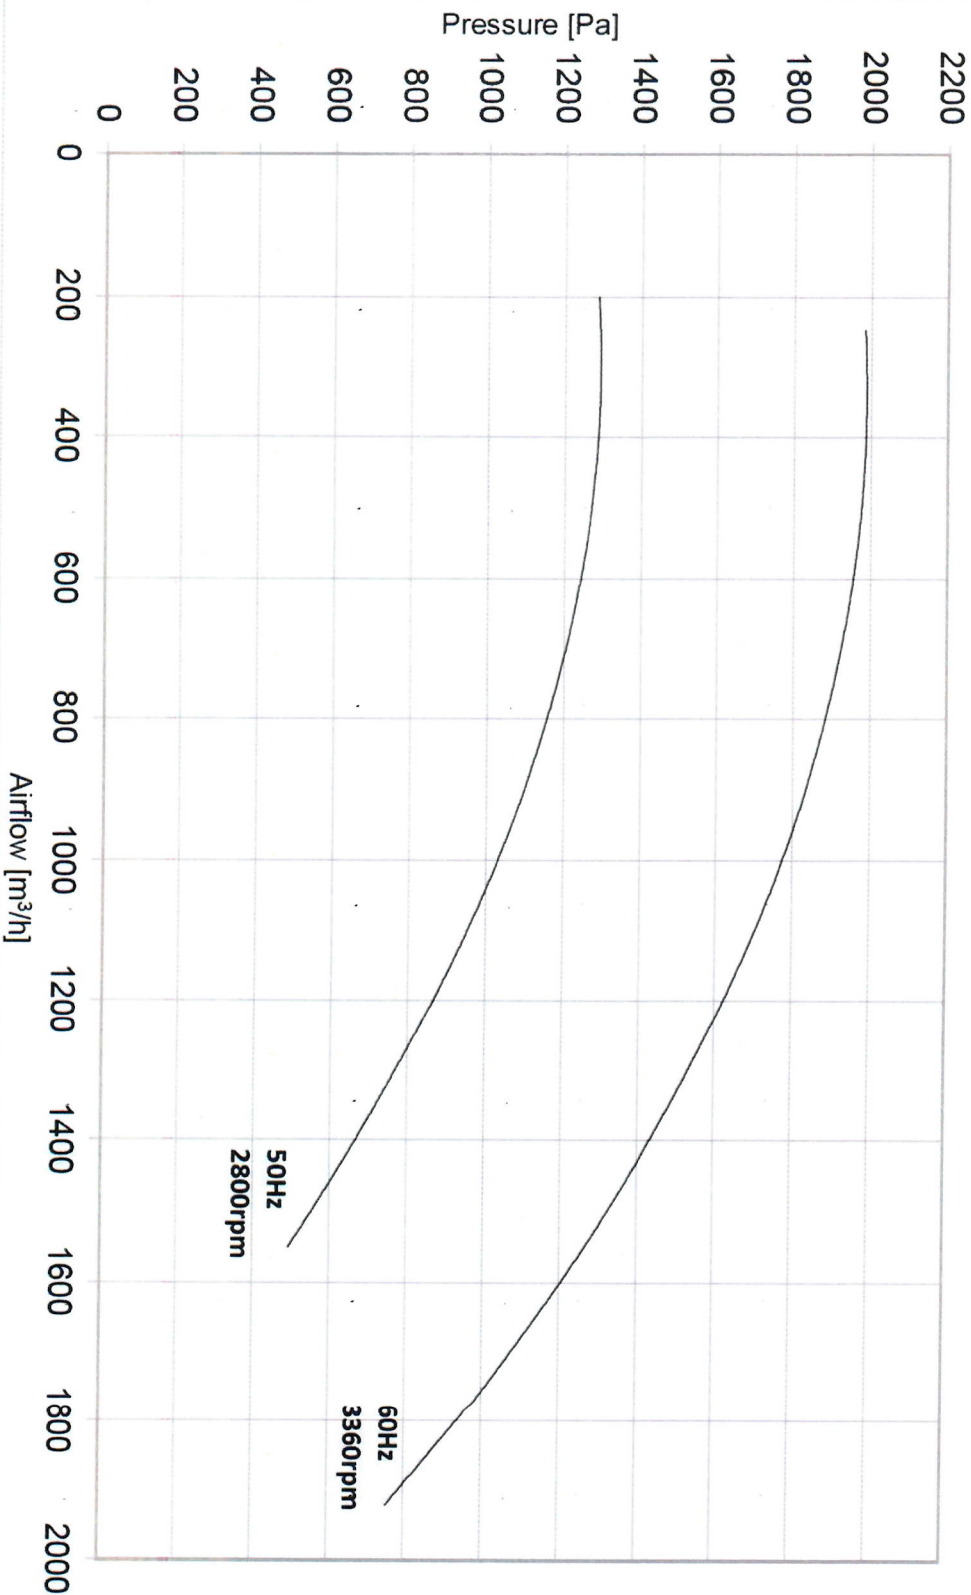

105202 ZWR-03 fan

Construction:


- Radial fan
- Dynamically balanced aluminium impeller
- Impeller mounted directly on motor shaft
- Steel, welded and powder coated construction
- Inlet and outlet safety grates

Notes:

Document changes:

Revision	Date	Comment
A	01.02.2021	-

The method of packing and carton sizes:



A = 605
 B = 505
 H = 550
 weight = 30 kg

All dimensions are in mm